

# Outdoor Lighting



**YUSING**

[www.yusinglighting.com](http://www.yusinglighting.com)

# Auxiliary street lamp



**IP65**

**120lm/w**


**30-200W**






## Product Details

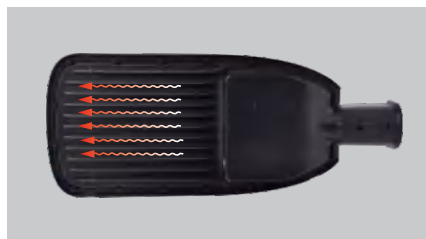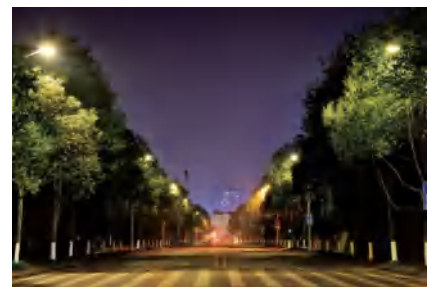

100W Lens



100W glass



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| RL160    | 100-240V    | 30          | 3600       | ≥70 | >0.9 | 20000         | Alu.     | 335*120*48     | 6/0.023/6.2                         |
| RL160    | 100-240V    | 50          | 6000       | ≥70 | >0.9 | 20000         | Alu.     | 385*165*50     | 4/0.025/6.8                         |
| RL160    | 100-240V    | 100         | 12000      | ≥70 | >0.9 | 20000         | Alu.     | 500*210*65     | 2/0.026/5.2                         |
| RL160    | 100-240V    | 150         | 18000      | ≥70 | >0.9 | 20000         | Alu.     | 600*245*70     | 1/0.015/4                           |
| RL160    | 100-240V    | 200         | 240000     | ≥70 | >0.9 | 20000         | Alu.     | 587*242*80     | 2/0.036/6.5                         |

# Auxiliary street lamp


**IP65**

**100lm/w**


**30-150W**






Product Details

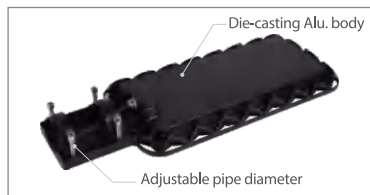

30W Glass



30W Lens



| Item No.         | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material   | Size [L*W*Hmm] | Packing [Pcs / M <sup>2</sup> / KG] |
|------------------|-------------|-------------|------------|-----|------|---------------|------------|----------------|-------------------------------------|
| RL182-30W-Glass  | 220-240     | 30          | 3000       | ≥70 | >0.9 | 20000         | Alu.+glass | 293*126*53     | 10/0.04/7.1                         |
| RL182-50W-Glass  | 220-240     | 50          | 5000       | ≥70 | >0.9 | 20000         | Alu.+glass | 347*136*53     | 6/0.04/7                            |
| RL182-100W-Glass | 220-240     | 100         | 10000      | ≥70 | >0.9 | 20000         | Alu.+glass | 455*170*53     | 6/0.04/12.9                         |
| RL182-150W-Glass | 220-240     | 150         | 15000      | ≥70 | >0.9 | 20000         | Alu.+glass | 550*200*53     | 4/0.04/14                           |
| RL182-30W-Lens   | 220-240     | 30          | 3000       | ≥70 | >0.9 | 20000         | Alu.+PC    | 293*126*53     | 10/0.04/7.1                         |
| RL182-50W-Lens   | 220-240     | 50          | 5000       | ≥70 | >0.9 | 20000         | Alu.+PC    | 347*136*53     | 6/0.04/7                            |
| RL182-100W-Lens  | 220-240     | 100         | 10000      | ≥70 | >0.9 | 20000         | Alu.+PC    | 455*170*53     | 6/0.04/12.9                         |
| RL182-150W-Lens  | 220-240     | 150         | 15000      | ≥70 | >0.9 | 20000         | Alu.+PC    | 550*200*53     | 4/0.04/14                           |

# Auxiliary street lamp

**IP65**

**100lm/w**

**30-150W**



## Product Details






30-150W



SMD3030



150W



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| RL179    | 100-240     | 30          | 3000       | ≥80 | >0.9 | 30000         | Alu.+PC  | 130*53*340     | 20/0.064/13.6                       |
| RL179    | 100-240     | 50          | 5000       | ≥80 | >0.9 | 30000         | Alu.+PC  | 155*55*390     | 10/0.044/9.6                        |
| RL179    | 100-240     | 100         | 10000      | ≥80 | >0.9 | 30000         | Alu.+PC  | 160*65*450     | 10/0.048/14                         |
| RL179    | 100-240     | 150         | 15000      | ≥80 | >0.9 | 30000         | Alu.+PC  | 170*65*570     | 5/0.041/10                          |

**SOSEN**  
LED DRLIER

**LUMILEDS**

**IK08**

ANTI-IMPACT

**IP65**

**170lm/w**


**UGR < 19**



Product Details



 **SMD3030**
 **-40°+50°**
 **60/90/120°**



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [DxHmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|--------------|-------------------------------------|
| HL150    | 100-277     | 100         | 17000      | ≥70 | >0.9 | 50000         | Alu.     | Ø258*115     | 4/0.030/18                          |
| HL150    | 100-277     | 150         | 25500      | ≥70 | >0.9 | 50000         | Alu.     | Ø298*115     | 4/0.040/20.7                        |
| HL150    | 100-277     | 200         | 34000      | ≥70 | >0.9 | 50000         | Alu.     | Ø298*115     | 4/ 0.040/20.7                       |

# LED Highbay Lamps

## IP65

### 100lm/w





Product Details



Luminous Angle 110°



100W

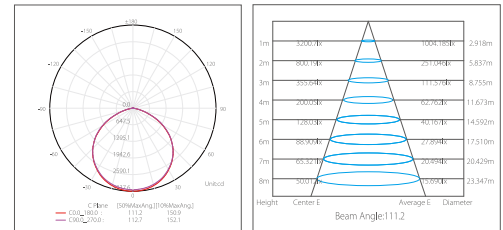

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [DxHmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|--------------|-------------------------------------|
| HL128-W  | 220-240     | 100         | 10000      | ≥70 | >0.9 | 30000         | Alu.     | Ø269.5*57.5  | 2/0.008/3.2                         |
| HL128-W  | 220-240     | 150         | 15000      | ≥70 | >0.9 | 30000         | Alu.     | Ø317*50      | 2/0.009/4.2                         |
| HL128-W  | 220-240     | 200         | 20000      | ≥70 | >0.9 | 30000         | Alu.     | Ø365*53.5    | 1/0.007/5.7                         |

# LED Highbay Lamps

**SOSEN**  
LED DRLIER


**LUMILEDS**

**IP65**




**150lm/W**



Optional lens/Glass

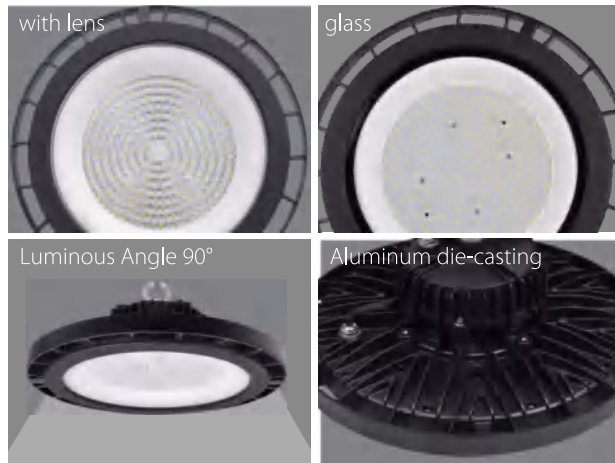

150W

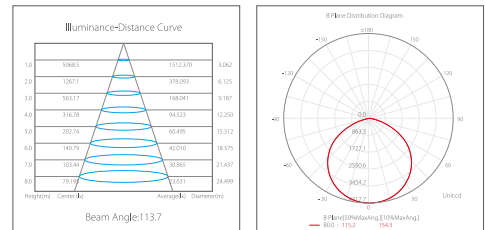

| Item No.  | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [DxHmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|-----------|-------------|-------------|------------|-----|------|---------------|----------|--------------|-------------------------------------|
| HL117-TG2 | 100-277     | 100         | 15000      | ≥70 | >0.9 | 30000         | Alu.     | Ø270*107     | 1/0.04/4.5                          |
| HL117-TG2 | 100-277     | 150         | 22500      | ≥70 | >0.9 | 30000         | Alu.     | Ø310*108     | 1/0.04/4.5                          |
| HL117-TG2 | 100-277     | 200         | 30000      | ≥70 | >0.9 | 30000         | Alu.     | Ø365*123     | 1/0.04/4.5                          |
| HL117-G2  | 100-277     | 100         | 15000      | ≥70 | >0.9 | 30000         | Alu.     | Ø270*107     | 1/0.04/4.5                          |
| HL117-G2  | 100-277     | 150         | 22500      | ≥70 | >0.9 | 30000         | Alu.     | Ø310*108     | 1/0.04/4.5                          |
| HL117-G2  | 100-277     | 200         | 30000      | ≥70 | >0.9 | 30000         | Alu.     | Ø365*123     | 1/0.04/4.5                          |

# LED Highbay Lamps

## IP65





### 100lm/W



#### Product Details



150W



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [DxHmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|--------------|-------------------------------------|
| HL117    | 220-240     | 60          | 6000       | ≥70 | >0.9 | 30000         | Alu.     | Ø230*48.5    | 1/0.03/1.75                         |
| HL117    | 220-240     | 80          | 8000       | ≥70 | >0.9 | 30000         | Alu.     | Ø230*48.5    | 1/0.03/1.75                         |
| HL117    | 220-240     | 100         | 10000      | ≥70 | >0.9 | 30000         | Alu.     | Ø270*57.5    | 1/0.026/1.05                        |
| HL117    | 220-240     | 150         | 15000      | ≥70 | >0.9 | 30000         | Alu.     | Ø317*50      | 1/0.033/2.53                        |
| HL117    | 220-240     | 200         | 20000      | ≥70 | >0.9 | 30000         | Alu.     | Ø365*53.5    | 1/0.024/4.5                         |



# Stadium & Tunnel Lights



**LUMILEDS**

**IP65**

**130lm/w**



Product Details







Angle adjustable 90°



Lens with 60°/90°

500W



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| LG653    | 100-277     | 500         | 65000      | ≥80 | >0.9 | 50 000        | Alu.+PC  | 690*530*125    | 1/0.048/24                          |
| LG653    | 100-277     | 1000        | 130000     | ≥80 | >0.9 | 50 000        | Alu.+PC  | 980*690*130    | 1/0.086/43                          |

# Stadium & Tunnel Lights



**LUMILEDS**

**IP65**




**130lm/w**



Product Details:



500W

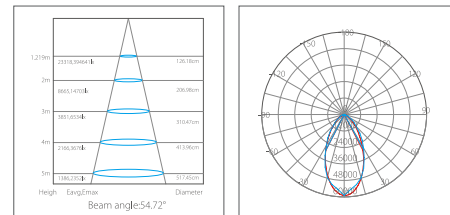

| Item No.      | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|---------------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| LG661-250W-C  | 100-277     | 250         | 32500      | ≥70 | >0.9 | 50000         | Alu.     | 401*215*128    | 1/0.026/8                           |
| LG661-500W-C  | 100-277     | 500         | 65000      | ≥70 | >0.9 | 50000         | Alu.     | 462*405*283    | 1/0.060/18                          |
| LG661-750W-C  | 100-277     | 750         | 97500      | ≥70 | >0.9 | 50000         | Alu.     | 698*405*283    | 1/0.076/27                          |
| LG661-1000W-C | 100-277     | 1000        | 130000     | ≥70 | >0.9 | 50000         | Alu.     | 954*405*285    | 1/0.137/31.9                        |

# LED Floodlights NEW




**90lm/w**  
**IP65**





Optional Cover



Optional accessories

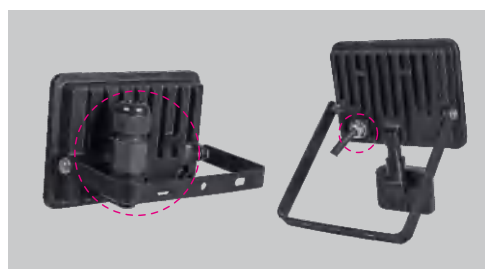

Product Details:

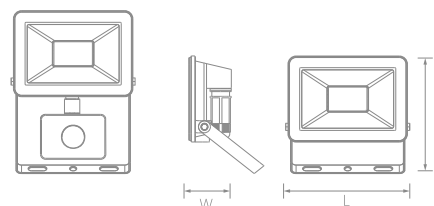

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | DF   | Life time [H] | Material   | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|------------|----------------|-------------------------------------|
| LG157C   | 220-240     | 10          | 900        | ≥80 | >0.5 | 30000         | Alu.+Glass | 108*63*80      | 30/0.025/9                          |
| LG157C   | 220-240     | 20          | 1800       | ≥80 | >0.7 | 30000         | Alu.+Glass | 128*63*102     | 30/0.03/12                          |
| LG157C   | 220-240     | 30          | 2700       | ≥80 | >0.9 | 30000         | Alu.+Glass | 153*63*118     | 20/0.032/12                         |
| LG157C   | 220-240     | 50          | 4500       | ≥80 | >0.9 | 30000         | Alu.+Glass | 203*63*154     | 16/0.035/15                         |
| LG157C   | 220-240     | 100         | 9000       | ≥80 | >0.9 | 30000         | Alu.+Glass | 274*195*37     | 5/0.034/15                          |
| LG157C   | 220-240     | 150         | 13500      | ≥80 | >0.9 | 30000         | Alu.+Glass | 337*246*42     | 4/0.015/14                          |
| LG157C   | 220-240     | 200         | 18000      | ≥80 | >0.9 | 30000         | Alu.+Glass | 382*275*45     | 4/0.20/15                           |

# LED Floodlights NEW









Color Temp.  
adjustable

**100lm/w**

**IP65 & IK08**



Product Details:

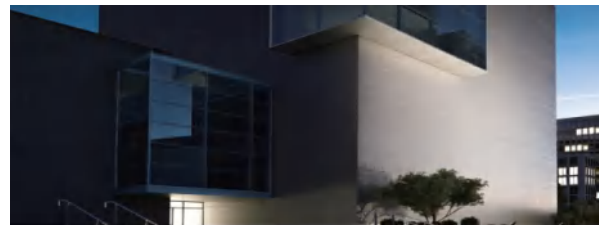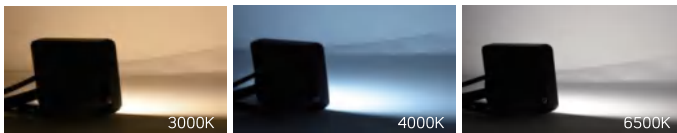

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material   | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|------------|----------------|-------------------------------------|
| LG155    | 220-240     | 20          | 2000       | ≥80 | >0.9 | 30000         | Alu.+Glass | 141*105*44     | 30/0.025/9                          |
| LG155    | 220-240     | 30          | 3000       | ≥80 | >0.9 | 30000         | Alu.+Glass | 181*130*44     | 20/0.03/12                          |
| LG155    | 220-240     | 50          | 5000       | ≥80 | >0.9 | 30000         | Alu.+Glass | 218*155*44     | 15/0.032/12                         |
| LG155    | 220-240     | 100         | 10000      | ≥80 | >0.9 | 30000         | Alu.+Glass | 300*200*52     | 10/0.035/15                         |

# LED Floodlights

**10-500w**

**90lm/w**

**IP65**



Products






Product Details:



High grade construction stainless steel Exquisite workmanship and high quality 200W

Optional Cover 10~50W

Ultra thin Design

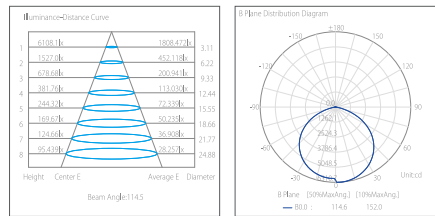

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material   | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|------------|----------------|-------------------------------------|
| LG189    | 220-240     | 10          | 900        | ≥80 | >0.5 | 30000         | Alu.+Glass | 103*77*23      | 60/0.025/12                         |
| LG189    | 220-240     | 20          | 1800       | ≥80 | >0.5 | 30000         | Alu.+Glass | 136*108*24     | 40/0.027/14                         |
| LG189    | 220-240     | 30          | 2700       | ≥80 | >0.9 | 30000         | Alu.+Glass | 176*136*25.5   | 20/0.022/10                         |
| LG189    | 220-240     | 50          | 4500       | ≥80 | >0.9 | 30000         | Alu.+Glass | 210*163*28     | 10/0.017/9                          |
| LG189    | 220-240     | 100         | 9000       | ≥80 | >0.9 | 30000         | Alu.+Glass | 255*198*36     | 10/0.028/11                         |
| LG189    | 220-240     | 150         | 13500      | ≥80 | >0.9 | 30000         | Alu.+Glass | 315*233*38     | 5/0.034/15                          |
| LG189    | 220-240     | 200         | 18000      | ≥80 | >0.9 | 30000         | Alu.+Glass | 410*298*40     | 4/0.015/14                          |
| LG189    | 220-240     | 300         | 27000      | ≥80 | >0.9 | 30000         | Alu.+Glass | 521*378*53     | 10/0.11/8                           |
| LG189    | 220-240     | 400         | 36000      | ≥80 | >0.9 | 30000         | Alu.+Glass | 696*419*56     | 12/0.16/10                          |
| LG189    | 220-240     | 500         | 45000      | ≥80 | >0.9 | 30000         | Alu.+Glass | 696*419*56     | 12/0.16/10                          |

# LED Floodlights

## ISPOT Ultra Thin Design

### with Respirator



90lm/w

IP65



**NO Frame**



#### Product Details

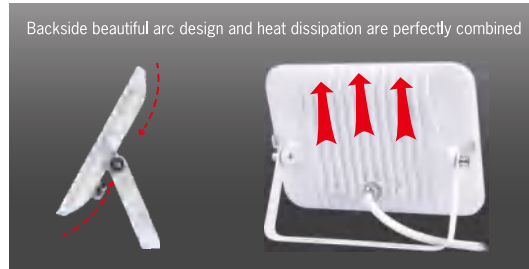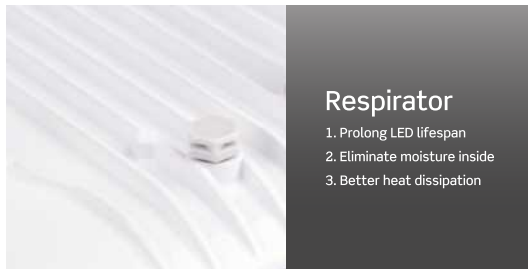

#### Accessories



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| LG168    | 100-240     | 10          | 900        | ≥70 | >0.5 | 30000         | Alu.     | 120*31*88      | 40/0.029/13.2                       |
| LG168    | 100-240     | 20          | 1800       | ≥70 | >0.9 | 30000         | Alu.     | 162*31*118     | 30/0.039/17.2                       |
| LG168    | 100-240     | 30          | 2700       | ≥70 | >0.9 | 30000         | Alu.     | 196*31*142     | 20/0.037/15.8                       |
| LG168    | 100-240     | 50          | 4500       | ≥70 | >0.9 | 30000         | Alu.     | 235*33*164     | 15/0.04/17.6                        |
| LG168    | 100-240     | 70          | 6300       | ≥70 | >0.9 | 30000         | Alu.     | 275*41*200     | 4/0.035/9.5                         |
| LG168    | 100-240     | 100         | 9000       | ≥70 | >0.9 | 30000         | Alu.     | 300*48*220     | 4/0.045/12                          |

# LED Floodlights

**10-300w**

**90lm/w**

**IP65**



Optional

Product details

SMD



With lens



High grade construction stainless steel



IP65





Counter flow design for cooling and protection, avoid leaves insects and other accumulations


✓ inclined bracket, convenient for installation



10W



3000 K 4000 K 6500 K




SMD2835



-40°+40°



110°



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| LG158    | 220-240V    | 10          | 900        | ≥70 | >0.5 | 30000         | Alu.     | 110*26*95      | 60/0.035/14.8                       |
| LG158    | 220-240V    | 20          | 1800       | ≥70 | >0.5 | 30000         | Alu.     | 132*28*115     | 40/0.035/13.4                       |
| LG158    | 220-240V    | 30          | 2700       | ≥70 | >0.9 | 30000         | Alu.     | 185*30*160     | 40/0.053/24.8                       |
| LG158    | 220-240V    | 50          | 4500       | ≥70 | >0.9 | 30000         | Alu.     | 216*32*185     | 20/0.041/18.2                       |
| LG158    | 220-240V    | 70          | 6300       | ≥70 | >0.9 | 30000         | Alu.     | 275*41*205     | 20/0.048/21.3                       |
| LG158    | 220-240V    | 100         | 9000       | ≥70 | >0.9 | 30000         | Alu.     | 328*41*268     | 4/0.021/9.31                        |
| LG158    | 220-240V    | 150         | 13500      | ≥70 | >0.9 | 30000         | Alu.     | 380*45*305     | 4/0.031/12.9                        |
| LG158    | 220-240V    | 300         | 33000      | ≥70 | >0.9 | 30000         | Alu.     | 539*49*376     | 1/0.025/8.1                         |

# ISPOT LED flood lights



**90lm/w**  
**IP65**






## Product Details



inclined bracket, convenient for installation



50W

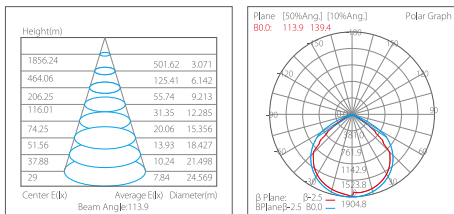

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| LG158S   | 220-240V    | 10          | 900        | ≥70 | >0.5 | 30000         | Alu.     | 131*40*188     | 20/0.025/15                         |
| LG158S   | 220-240V    | 20          | 1800       | ≥70 | >0.5 | 30000         | Alu.     | 184*49*225     | 20/0.040/20                         |
| LG158S   | 220-240V    | 30          | 2700       | ≥70 | >0.9 | 30000         | Alu.     | 215*60*260     | 10/0.035/15                         |
| LG158S   | 220-240V    | 50          | 4500       | ≥70 | >0.9 | 30000         | Alu.     | 230*60*295     | 10/0.045/22                         |



# LED Floodlights

## IP65



### Products



### Product details

High grade construction stainless steel

SMD







Counter flow design for cooling and protection late, avoid leaves, insects and other accumulations.

✓ inclined bracket, convenient for installation



10W



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material   | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|------------|----------------|-------------------------------------|
| LG162    | 220-240V    | 10          | 850        | ≥70 | >0.9 | 20000         | Alu.+glass | 90*63*25       | 80/0.031/10.6                       |
| LG162    | 220-240V    | 20          | 1700       | ≥70 | >0.9 | 20000         | Alu.+glass | 108*82*28      | 60/0.030/11.8                       |
| LG162    | 220-240V    | 30          | 2550       | ≥70 | >0.9 | 20000         | Alu.+glass | 143*102*30     | 40/0.032/13                         |
| LG162    | 220-240V    | 50          | 4250       | ≥70 | >0.9 | 20000         | Alu.+glass | 183*132*30     | 20/0.027/12                         |





# LED Floodlights



**10-300W**  
**IP65**



Product Details:

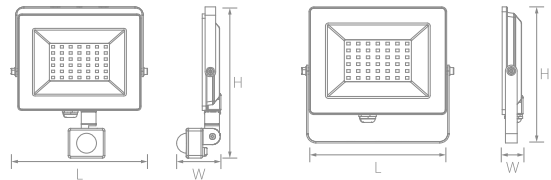

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| LG175S   | 220-240     | 20          | 1700       | ≥80 | >0.5 | 20000         | Alu.     | 117.6*90*21    | 30/0.04/10                          |
| LG175S   | 220-240     | 30          | 2550       | ≥80 | >0.9 | 20000         | Alu.     | 140.6*110*21   | 30/0.05/13.5                        |
| LG175S   | 220-240     | 50          | 4250       | ≥80 | >0.9 | 20000         | Alu.     | 183*143*22     | 20/0.06/15                          |
| LG175    | 220-240     | 10          | 850        | ≥80 | >0.5 | 20000         | Alu.     | 81.2*63*21     | 50/0.030/11                         |
| LG175    | 220-240     | 20          | 1700       | ≥80 | >0.5 | 20000         | Alu.     | 117.6*90*21    | 40/0.035/12                         |
| LG175    | 220-240     | 30          | 2550       | ≥80 | >0.9 | 20000         | Alu.     | 140.6*110*21   | 20/0.032/15                         |
| LG175    | 220-240     | 50          | 4250       | ≥80 | >0.9 | 20000         | Alu.     | 183*143*22     | 20/0.056/18                         |
| LG175    | 220-240     | 70          | 5950       | ≥80 | >0.9 | 20000         | Alu.     | 183*143*22     | 10/0.045/10                         |
| LG175    | 220-240     | 100         | 85000      | ≥80 | >0.9 | 20000         | Alu.     | 205*150*22     | 10/0.054/13                         |
| LG175    | 220-240     | 150         | 12750      | ≥80 | >0.9 | 20000         | Alu.     | 265*188*52     | 10/0.058/13                         |
| LG175    | 220-240     | 200         | 17000      | ≥80 | >0.9 | 20000         | Alu.     | 380*306*55     | 4/0.046/12                          |
| LG175    | 220-240     | 300         | 25500      | ≥80 | >0.9 | 20000         | Alu.     | 420*300*42     | 4/0.058/15                          |

# LED Floodlights



LUMILEDS





120lm/w

100-300w

IP65



Product details



| Item No.    | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [LxWxHmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|-------------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| LG198-C-LEN | 100-240     | 100         | 12000      | ≥80 | >0.9 | 50000         | Alu.     | 341*257*59     | 2/0.019/8                           |
| LG198-C-LEN | 100-240     | 150         | 18000      | ≥80 | >0.9 | 50000         | Alu.     | 374*280*63     | 2/0.027/9                           |
| LG198-C-LEN | 100-240     | 200         | 24000      | ≥80 | >0.9 | 50000         | Alu.     | 417*299*68     | 1/0.024/5                           |
| LG198-C-LEN | 100-240     | 300         | 36000      | ≥80 | >0.9 | 50000         | Alu.     | 482*345*73     | 1/0.04/9                            |

# LED Floodlights



**100lm/w**  
**100-300w**

**IP65**




## Product details



1. Die casting aluminum shell, interactive struction, greatly improve the heat dissipation;
2. Ultra thin design, thickness for 10W is 25mm only;
3. Unique space for sticker, more reasonable;
4. The bracket with Adjustable gear convenient for adjust angle(100-300W).




3000 K    4000 K    6500 K



**SMD2835**

**-40° +45°**

**110°**



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [LxWxHmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|-------------------------------------|
| LG198    | 100-240     | 10          | 800        | ≥70 | >0.5 | 30000         | Alu.     | 98*25*75       | 40/0.018/12                         |
| LG198    | 100-240     | 20          | 1600       | ≥70 | >0.5 | 30000         | Alu.     | 118*25*95      | 40/0.018/14                         |
| LG198    | 100-240     | 30          | 2400       | ≥70 | >0.9 | 30000         | Alu.     | 140*28*112     | 30/0.02/9                           |
| LG198    | 100-240     | 50          | 4000       | ≥70 | >0.9 | 30000         | Alu.     | 170*34*136     | 25/0.019/10                         |
| LG198    | 100-240     | 70          | 5600       | ≥70 | >0.9 | 30000         | Alu.     | 206*34*166     | 10/0.023/13                         |
| LG198    | 100-240     | 100         | 10000      | ≥70 | >0.9 | 30000         | Alu.     | 341*257*59     | 2/0.019/8                           |
| LG198    | 100-240     | 150         | 15000      | ≥70 | >0.9 | 30000         | Alu.     | 374*280*63     | 2/0.027/9                           |
| LG198    | 100-240     | 200         | 20000      | ≥70 | >0.9 | 30000         | Alu.     | 417*299*68     | 1/0.024/5                           |
| LG198    | 100-240     | 300         | 30000      | ≥70 | >0.9 | 30000         | Alu.     | 482*345*73     | 1/0.04/9                            |

# LED Floodlights

RGBW



Remote control

RGBW+CCT

**IP65**



**ERP2.0**


Product Details:



The product takes the lighting effect actually



### Instructions for remote control



| Item No.    | Voltage [V] | Wattage [W] | Lumen [lm] | LED ChipType | Ra | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs / M <sup>3</sup> / KG] |
|-------------|-------------|-------------|------------|--------------|----|------|---------------|----------|----------------|-------------------------------------|
| LG1166-RGBW | 220-240     | 15          | 1250       | 2835+5054    | /  | >0.5 | 30000         | Alu.+PC  | 120*90*25      | 40/0.026/14                         |

# Movable work lights



LG158-H



LG158-L




LG158-D



LG158-D2

  **ErP IP65**

with Tripod-stand , the height 1.5M, and 3\*1.0mm<sup>2</sup> rubber cable 1.5M with plug



 **SMD2835**  **-40°+50°**  **110°**

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life time [H] | Material | Size [L*W*Hmm] | Packing [Pcs/M <sup>3</sup> /KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|----------------------------------|
| LG158-H  | 220-240V    | 20          | 1800       | ≥80 | >0.5 | 30000         | Alu.     | 220*65*210     | 10/0.047/10                      |
| LG158-L  | 220-240V    | 20          | 1800       | ≥80 | >0.5 | 30000         | Alu.     | 240*60*300     | 5/0.0296/5                       |
| LG158-D  | 220-240V    | 20          | 1800       | ≥80 | >0.5 | 30000         | Alu.     | 650*130*210    | 2/0.044/5                        |
| LG158-D2 | 220-240V    | 2*20        | 3600       | ≥80 | >0.5 | 30000         | Alu.     | 650*135*215    | 2/0.044/5.5                      |

**IK08**  
ANTI-IMPACT

**IP65**  
CORROSION PROOF



BL111




BL112



Three color options



✓ convenient for installation

Terminals

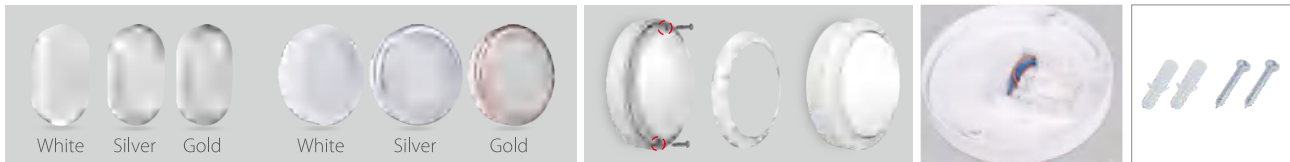

Three color options

✓ convenient for installation

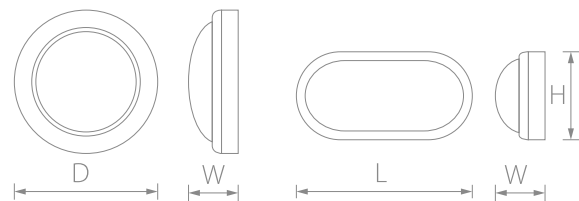

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life Time [H] | Material | Size [L*W*Hmm] | Packing [Pcs/m <sup>2</sup> /KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|----------------------------------|
| BL111    | 220-240     | 8           | 540        | ≥70 | >0.5 | 30000         | PC+ABS   | Ø140*58        | 20/0.035/7.0                     |
| BL111    | 220-240     | 15          | 1050       | ≥70 | >0.5 | 30000         | PC+ABS   | Ø180*66        | 20/0.061/14.0                    |
| BL112    | 220-240     | 8           | 540        | ≥70 | >0.5 | 30000         | PC+ABS   | 168*100*58     | 30/0.041/8.0                     |
| BL112    | 220-240     | 15          | 1050       | ≥70 | >0.5 | 30000         | PC+ABS   | 221*131*68     | 20/0.055/14.0                    |

**IK08**  
ANTI-IMPACT

**IP65**  
CORROSION PROOF




BL211



BL212


**ERP2.0**

3 Color Temperature Adjustment

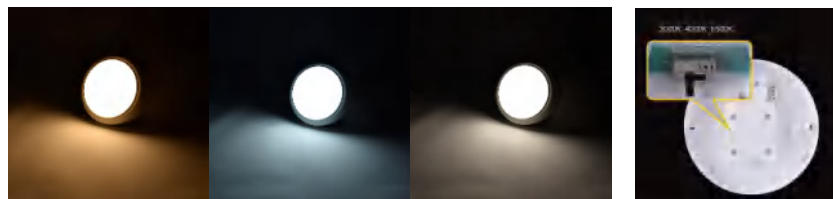


convenient for installation

Terminals



**SMD2835** **-20°+40°** **110°**

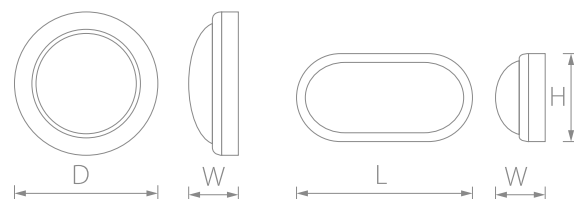

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life Time [H] | Material | Size [L*W*Hmm] | Packing [Pcs/m <sup>2</sup> /KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|----------------------------------|
| BL211    | 220-240     | 15          | 1275       | ≥80 | >0.7 | 30000         | PC+PC    | ∅180*66        | 20/0.061/14.0                    |
| BL212    | 220-240     | 15          | 1275       | ≥80 | >0.7 | 30000         | PC+PC    | 221*131*68     | 20/0.055/14.0                    |




# LED Bulkhead Lights

## IK08

ANTI-IMPACT

## IP44

CORROSION PROOF





### PIR 6-8M DETECTION RANGE

- Adjustable hold time (60 secs)
- Built in daylight sensor, adjustable lux level
- Detection distance:2-6M
- detection angle:90°

### Three color options



### Terminals

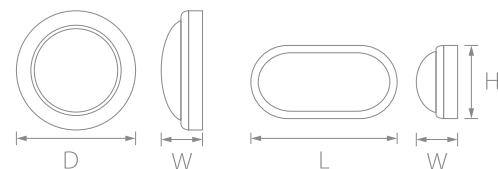

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life Time [H] | Material | Size [L*W*Hmm] | Packing [Pcs/m <sup>3</sup> /KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|----------------------------------|
| BL111S   | 220-240     | 15          | 1050       | ≥70 | >0.5 | 30000         | PC+ABS   | ∅180*66        | 20/0.061/14.0                    |
| BL112S   | 220-240     | 15          | 1050       | ≥70 | >0.5 | 30000         | PC+ABS   | 221*131*68     | 20/0.055/14.0                    |

# LED Bulkhead Lights

**IP65**

CORROSION PROOF



BL151




BL152




## Product Details



### Easy installation

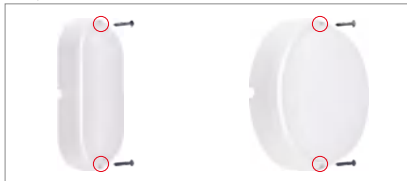

### Terminals

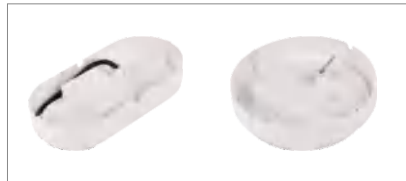

| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life Time [H] | Material | Size [L*W*Hmm] | Packing [Pcs/m <sup>2</sup> /KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|----------------------------------|
| BL151    | 100-240     | 8           | 640        | ≥80 | >0.5 | 15000         | PP+PP    | Ø140*57        | 50/0.068/10.3                    |
| BL151    | 100-240     | 12          | 960        | ≥80 | >0.5 | 15000         | PP+PP    | Ø155*62        | 50/0.081/11.5                    |
| BL151    | 100-240     | 18          | 1440       | ≥80 | >0.5 | 15000         | PP+PP    | Ø172*62        | 50/0.104/13.8                    |
| BL152    | 100-240     | 8           | 640        | ≥80 | >0.5 | 15000         | PP+PP    | 155*80*55      | 50/0.043/7.7                     |
| BL152    | 100-240     | 12          | 960        | ≥80 | >0.5 | 15000         | PP+PP    | 174*87*55      | 50/0.055/8.8                     |
| BL152    | 100-240     | 18          | 1440       | ≥80 | >0.5 | 15000         | PP+PP    | 198*95*55      | 50/0.066/10.4                    |

# LED Bulkhead Lights

**IP54**

CORROSION PROOF




BL129



BL130


## Product Details

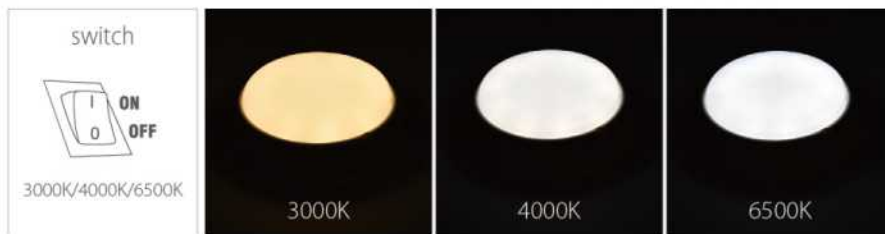

## Easy installation



## Terminals



| Item No. | Voltage [V] | Wattage [W] | Lumen [lm] | Ra  | PF   | Life Time [H] | Material | Size [L*W*Hmm] | Packing [Pcs/m <sup>2</sup> /KG] |
|----------|-------------|-------------|------------|-----|------|---------------|----------|----------------|----------------------------------|
| BL129    | 220-240     | 8           | 560        | ≥70 | >0.5 | 20000         | PP+PP    | Ø150*53.5      | 40/0.058/8.0                     |
| BL129    | 220-240     | 15          | 1050       | ≥70 | >0.5 | 20000         | PP+PP    | Ø190*59.5      | 40/0.083/11.0                    |
| BL129    | 220-240     | 24          | 1680       | ≥70 | >0.5 | 20000         | PP+PP    | Ø230*64.5      | 20/0.058/9.0                     |
| BL130    | 220-240     | 8           | 510        | ≥70 | >0.5 | 20000         | PP+PP    | 180*90*51      | 40/0.045/7.0                     |
| BL130    | 220-240     | 12          | 980        | ≥70 | >0.5 | 20000         | PP+PP    | 205*100*54.5   | 40/0.055/10.0                    |

**YUSING**

[www.yusinglighting.com](http://www.yusinglighting.com)

**Ningbo Yusing Lighting Co, Ltd**

 **ADD:**No.1199Mingguang Road,jiangshan Town,Yingzhou,Ningbo China

 **TEL:**0574-83028340

 **E-mail:**sales79@yusinglighting.com